

# LogiLink®



## Mini Hot Glue Gun, 10W

Art. No.: WZ0050  
WZ0053

### Your Perfect DIY Companion

This mini hot glue gun, great for DIY enthusiasts, is light weight, with a comfortable grip and a built-in stand making it easy to use. The insulated nozzle allows for precise application on whatever project you are working on — an ideal tool for a wide-range of crafts and repairs.



RoHS  
compliant



\*The specifications and pictures are subject to change without prior notice.  
\*All trade names referenced are the registered trademarks of their respective owners.



# LogiLink®

## Mini Hot Glue Gun, 10W

Art. No.: WZ0050  
WZ0053



### Glue Everything

All purpose glue gun suitable for gluing, sealing joints, and filling gaps, as well as for crafts and decoration projects around the house.

### Ergonomic and Safe Design

Compact and light weight design with a built-in stand that allows the glue gun to retain a stable upright position; also includes enhanced safety features such as an insulated nozzle and safety fuse.

### Easy to Use

Simply pop in a glue stick, warm it up for 5-7 minutes, then gently pull the trigger and start gluing.



Fits 7.2mm hot glue sticks (WZ0053)



\*The specifications and pictures are subject to change without prior notice.  
\*All trade names referenced are the registered trademarks of their respective owners.


Best Connectivity



# LogiLink®

## Mini Hot Glue Gun, 10W

Art. No.: WZ0050  
WZ0053

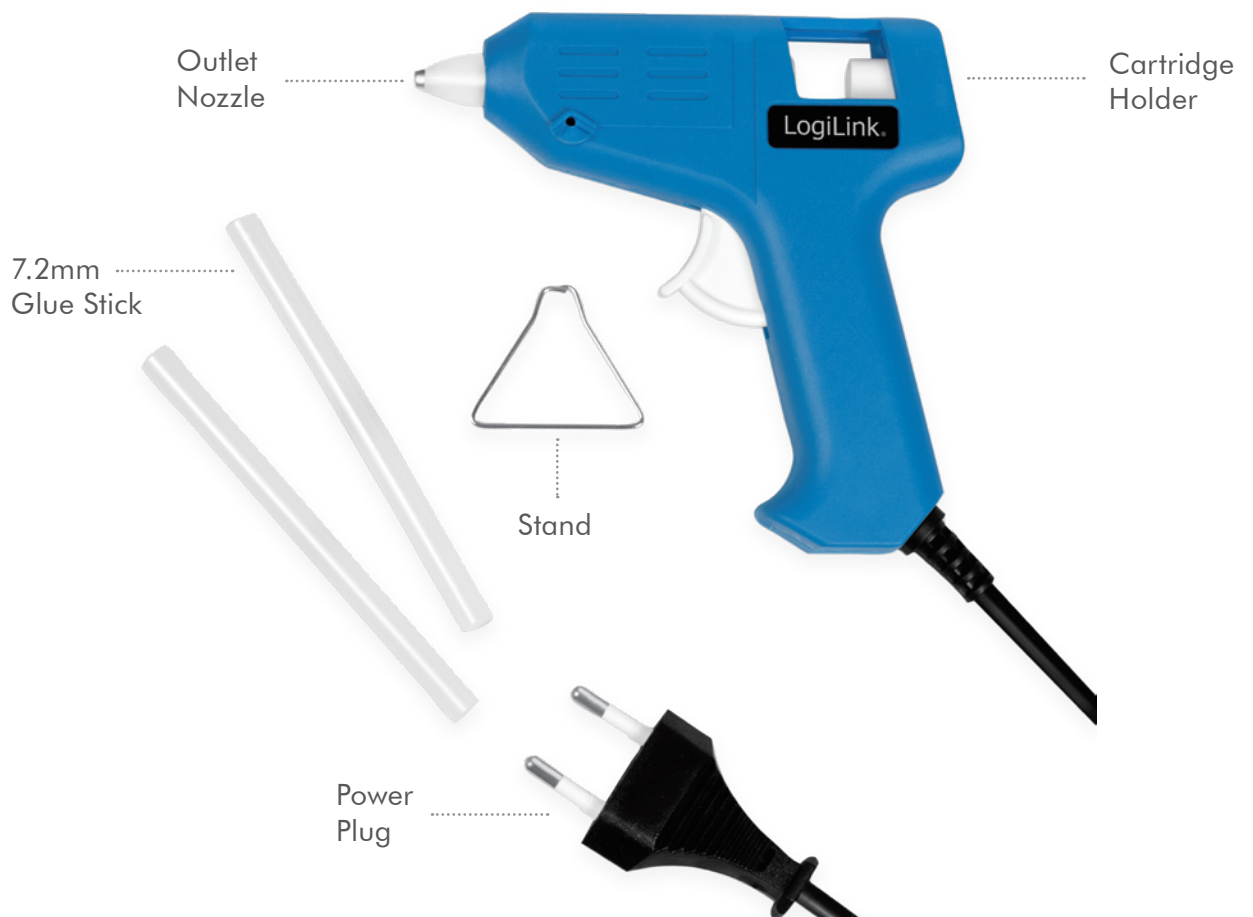

Art-No.	Package Contents	EAN Code
WZ0050	1 x Mini Hot Glue Gun, 10W 2 x Glue Sticks 1 x User Manual	4052792060874
WZ0053	12 x Hot Glue Sticks, $\varnothing 7.2 \times 100$ mm	4052792060973



RoHS  
compliant



\*The specifications and pictures are subject to change without prior notice.  
\*All trade names referenced are the registered trademarks of their respective owners.

# LogiLink®

## Mini Hot Glue Gun, 10W

Art. No.: WZ0050  
WZ0053



### WZ0050 Specification:

Power	230V AC 50Hz 10W
Preheat Time	5-7 minutes
Flow of Glue	6-8g/min
Glue Stick Diameter	Ø7.2mm

### WZ0053 Specification:

Open Time	1-2 minutes
Curing Time	30 seconds
Softening Temperature	85-90°C
Operating Temperature	100-200°C
Main Material	EVA



### Package Information:

Art-No.	Packing Dimension	Packing Weight	Carton Dimension	Carton Q'ty	Carton Weight
WZ0050	mm	kg	mm	pcs	kg
WZ0053	mm	kg	mm	pcs	kg

⚠ Do not touch heated nozzle or melted glue as temperature can reach 204.4°C. If contact is made with hot glue, submerge affected area in cold water. Keep out of reach of children. Unplug when not in active use.

\*The specifications and pictures are subject to change without prior notice.  
\*All trade names referenced are the registered trademarks of their respective owners.



RoHS  
compliant



Best Connectivity