

# LogiLink®

## Foldable Solar Panel USB Charger

Art. No.: PA0339  
PA0340  
PA0341



## Portable and Convenient Charging Solution

Keep your devices powered with LogiLink Solar Panel USB Charger while enjoying outdoor activities such as camping, hiking, picnic or fishing.

**Foldable**

**Solar  
Power**

**High  
Conversion**

**ETFE  
Surface**

**USB  
Output**


**IP65  
Panel**

**Safe  
to Use**

**Outdoor  
Activities**

## Solar Energy On the Go

The solar panel absorbs natural light from the sun and converts it into energy, making this charger the idea companion to camping, hiking or fishing trips.

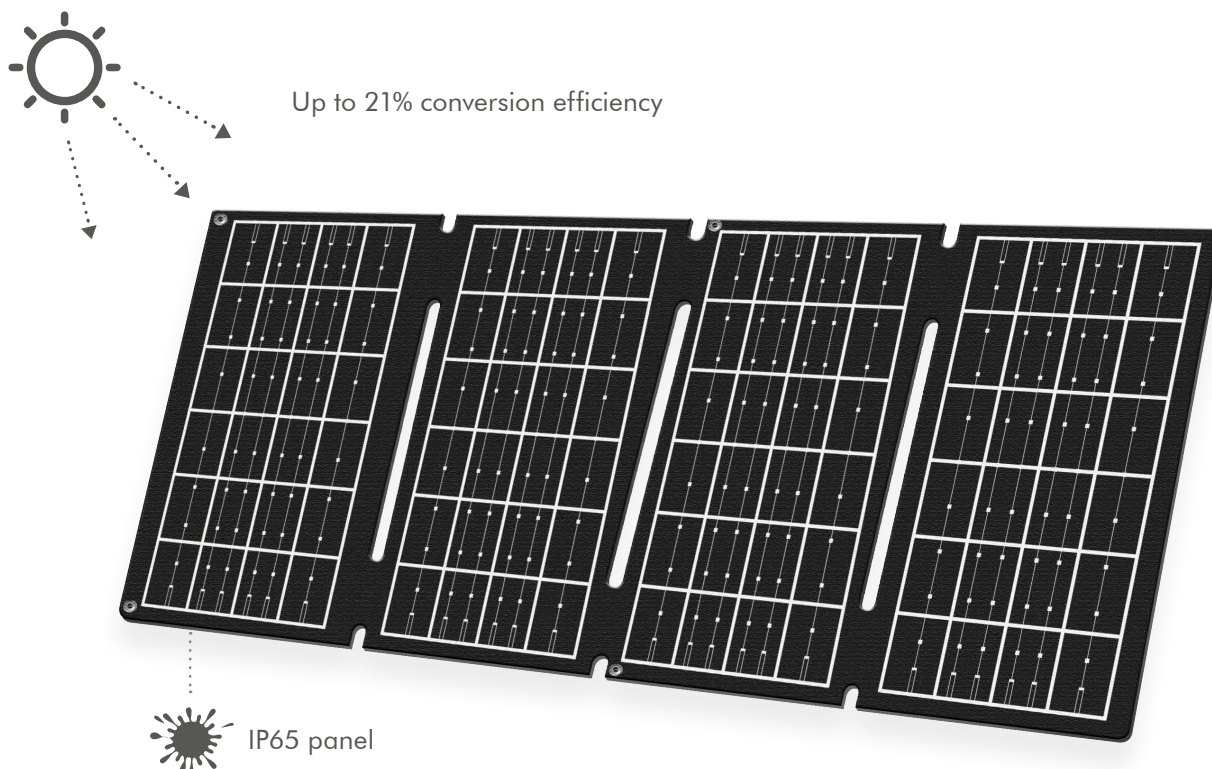

### ETFE Surface

Reduce the light reflectivity, increase solar panel light absorption rate, and could extend lifespan of the high efficiency monocrystalline solar panel.

### Safe to Use


Multiple charging protections including overcharge, overdischarge, overload, overcurrent, overtemperature and short circuit.

### Wide Compatibility

Charge your smartphones, tablets, digital cameras, GPS, power bank and other USB devices wherever you are.




### Foldable & Lightweight

Foldable design, you could easily fit the solar panel charger into your backpack or luggage and take it anywhere.

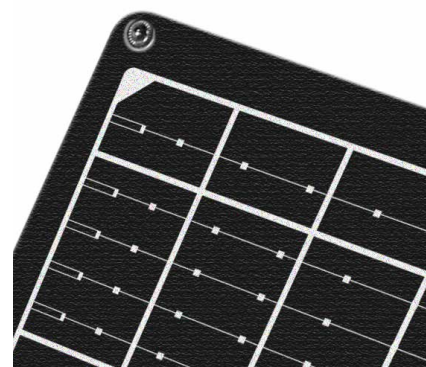



## Specifications:



Art-No.	PA0339	PA0340	PA0341
EAN Code	4052792074888	4052792074895	4052792074901
Solar Panel Folding Number	2	4	2
Output Ports	1x USB-A female	1x USB-A female, 1x USB-C female	1x USB-A female, 1x USB-C female, 1x DC5521 female
Power Output	USB-A: 5 V/1.5 A (7 W) Total output: 7 W max.	USB-A: 5 V/3 A (15 W) USB-C: 5 V/3 A (15 W) Total output: 15 W max.	USB-A: 5 V/2 A, 9 V/2 A, 12 V/1.67 A (20 W max.) USB-C: 5 V/3 A, 9 V/2 A, 12 V/1.5 A, 20 V/1.5 A (30 W max.) DC5521: 22 V/1.4 A (30 W max.) USB-A+C: 25 W max. USB-A+C+DC5521: 25 W max. Total output: 30 W max.
LED Indication	Green (steady)	Red (flashing)	Red (steady)
Solar-Cell Efficiency	Up to 21%		
Solar Cell Lamination	ETFE		
Panel Material	Monocrystalline silicon		
Waterproof Grade	IP65 (panel)		
Operating Temperature	0–60 °C		
Operating Humidity	40–60% RH (non-condensing)		
Unfolded Dimensions	24.6 x 19.5 x 0.3 cm	47.9 x 22.1 x 0.2 cm	62 x 29 x 0.2 cm
Folded Dimensions	11.9 x 19.5 x 1.57 cm	11.7 x 22.1 x 1.7 cm	30.8 x 29 x 0.8 cm
Weight	189 g	323 g	602 g

## Package Contents:

- » 1 x Solar Panel
- » 1 x User Manual

## Package Information:

Art-No.	Packing Dimension	Packing Weight	Carton Dimension	Carton Q'ty	Carton Weight
PA0339	210 x 127 x 25 mm	0.21 kg	405 x 275 x 235 mm	30 pcs	6.71 kg
PA0340	235 x 125 x 40 mm	0.41 kg	405 x 270 x 260 mm	20 pcs	8.71 kg
PA0341	325 x 300 x 30 mm	0.82 kg	475 x 340 x 325 mm	15 pcs	12.9 kg



\*The specifications and pictures are subject to change without prior notice.  
\*All trade names referenced are the registered trademarks of their respective owners.

Made in China