# **LogiLink**<sub>®</sub>



USB-C Multiport Charging Station, 15 Ports

Art. No.: SCS0112



The USB-C Charging Station can charge up to 15 notebooks, tablets, smartphone, power banks or other USB-C devices.











Overcurrent Protection




360W Ouput

Intelligent Charging




## Power Delivery 3.0 (USB-C PD 3.0)

USB-C PD 3.0 automatically detects various devices and adjusts the charging power to optimize speed, delivering up to 60W of high-power output from a single port.



# **Smart Charging**

Automatically adjusts the charging sequence, giving higher priority to batteries with lower power levels.

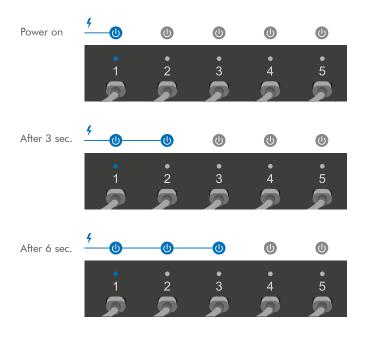


#### **Soft Start**

Soft Start is a crucial protective feature against power surges. Rather than delivering full power immediately, it gradually ramps up the output, ensuring a safer and more stable charging process.









#### **Auto-Controlled Fan**

Al control the activate timing, it greatly extends the life of the fan while keeping charging station quiet.






## **Safety Protections**

Controlled by the internal IC for enhanced safety.

Total Current Protection: Ports will dynamically turn off if the total output exceeds the charging station's limit.

Over Current Protection: Each port will automatically shut off if its output exceeds the specified limit.



## **Stable Synchronization**

Sync iPads simultaneously using Apple configuration software or through USB-C sync port.



# **Easy Setup**

Install on a desktop stand or in a 19" cabinet with rack mount options.









#### **Modularize To Your Needs**

Users have the flexibility to enhance their system by separately integrating the Wi-Fi Charging Management Module (SCS0119), Charging Cart, and Trolley Cart Base (SCS0150) as needed.



## **Remote Monitoring with SCS0119**

If install Wi-Fi Charging Management Module (SCS0119) to the charging station, the user can easily monitor charging status and set up charging schedules directly from their device's web browser.

\*See LogiLink website for more modularization combinations and products.

## **Specifications:**

Power Supply	AC 100-240 V, 50/60 Hz, 10 A±10%
Interface	1x USB-C female (for data sync), 15x USB-C female ports
Output Per Port	5 V/3 A (15 W), 9 V/3 A (27 W), 12 V/3 A (36 W), 15 V/3 A (45 W) 20 V/3 A (60 W max.)
Total Output	360 W max.
Protections	Overcurrent and short circuit
Data Sync	Yes
LED Status Indicators	Yes
Operating Temperature	0-40°C
Dimensions	44 x 19 x 4.4 cm
Weight	2.8 kg
Color	Black

## **Package Contents:**

- » 1x Charging Station
- » 1x AC Power Cable
- » 1x 19" Rack Mounting Kit
- » 1x User Manual

## Package Information:

» Packing Dimension: 548 x 251 x 84 mm

» Packing Weight: 3.7 kg

» Carton Dimension: 575 x 360 x 277 mm

» Carton Q'ty: 4 pcs» Carton Weight: 15 kg





